


Concrete Screw - Countersunk



A rapid and effective light duty anchoring system for fixing into concrete, brick, stone, concrete block and wood. This through fixing provides a single solution and replaces traditional fixings such as nylon frame and hammer fixings.

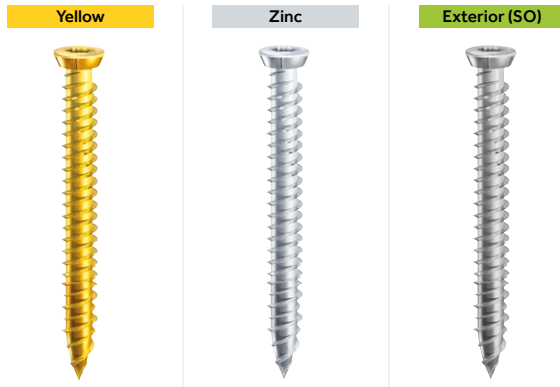

- Conforms to BS 7671:2018



Technical Data

Substrate	Concrete ≥25N/mm ²		Fletton Brick 30N/mm ²		Cheshire Brick 45N/mm ²		Class B Eng. Brick 75N/mm ²	
	40-70	80-200	40-70	80-200	40-70	80-200	40-70	80-200
Length (mm)	40-70	80-200	40-70	80-200	40-70	80-200	40-70	80-200
Drill Hole Ø (mm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Min. Embedment Depth (mm)	35	50	35	50	35	50	35	50
Min. Drill Hole Depth (mm)	45	60	40	60	40	60	40	60
Rec. Tensile Load (kN)	1.07	1.82	1.17	1.79	0.75	1.46	0.85	1.22
Max Rec. Load (kg)	107	182	117	179	75	146	85	122

Product Code	Size (mm)	Driver Bit Size	Max. Fixture Thickness (mm)	Fixture Clearance Hole Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
Yellow							
BOX (TX30 DRIVER BIT INCLUDED)							
00040TCON	7.5x40	TX30	5	8.0	100	18	648
00050TCON	7.5x50	TX30	15	8.0	100	12	432
00060TCON	7.5x60	TX30	25	8.0	100	10	360
00070TCON	7.5x70	TX30	35	8.0	100	10	360
00080TCON	7.5x80	TX30	30	8.0	100	10	360
00090TCON	7.5x90	TX30	40	8.0	100	10	360
00100TCON	7.5x100	TX30	50	8.0	100	10	360
00110TCON	7.5x110	TX30	60	8.0	100	10	360
00120TCON	7.5x120	TX30	70	8.0	100	8	288
00130TCON	7.5x130	TX30	80	8.0	100	8	288
00150TCON	7.5x150	TX30	100	8.0	100	8	288
00180TCON	7.5x180	TX30	130	8.0	100	6	216
00200TCON	7.5x200	TX30	150	8.0	100	6	216


TIMBAG							
00050TCONB	7.5x50	TX30	15	8.0	100	5	
00060TCONB	7.5x60	TX30	25	8.0	85	5	
00070TCONB	7.5x70	TX30	35	8.0	75	5	
00080TCONB	7.5x80	TX30	30	8.0	65	5	
00100TCONB	7.5x100	TX30	50	8.0	55	5	
00120TCONB	7.5x120	TX30	70	8.0	45	5	
00150TCONB	7.5x150	TX30	100	8.0	30	5	

TIMPAC							
00050TCONP	7.5x50	TX30	15	8.0	8	10	
00060TCONP	7.5x60	TX30	25	8.0	6	10	
00070TCONP	7.5x70	TX30	35	8.0	5	10	
00080TCONP	7.5x80	TX30	30	8.0	5	10	
00100TCONP	7.5x100	TX30	50	8.0	4	10	
00120TCONP	7.5x120	TX30	70	8.0	3	10	
00150TCONP	7.5x150	TX30	100	8.0	2	10	

Zinc							
BOX (TX30 DRIVER BIT INCLUDED)							
00080TCONZ	7.5x80	TX30	30	8.0	100	10	360
00100TCONZ	7.5x100	TX30	50	8.0	100	10	360
00120TCONZ	7.5x120	TX30	70	8.0	100	8	288
00150TCONZ	7.5x150	TX30	100	8.0	100	8	288

Exterior (Silver Organic)							
BOX (TX30 DRIVER BIT INCLUDED)							
80TCONR	7.5x80	TX30	30	8.0	100	10	360
100TCONR	7.5x100	TX30	50	8.0	100	10	360
120TCONR	7.5x120	TX30	70	8.0	100	8	288

Concrete Screw - Pan Head



A rapid and effective light duty anchoring system for fixing into concrete, brick, stone, concrete block and wood. This through fixing provides a single solution and replaces traditional fixings such as nylon frame and hammer fixings. Zinc plated with a pan head to improve clamping.

Product Code	Size (mm)	Driver Bit Size	Max. Fixture Thickness (mm)	Fixture Clearance Hole Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX (TX30 DRIVER BIT INCLUDED)							
7580MFPAN	7.5 x 80	TX30	30	8.0	100	10	360
75100MFPAN	7.5 x 100	TX30	50	8.0	100	10	360
75120MFPAN	7.5 x 120	TX30	70	8.0	100	8	288

Cover Caps (for countersunk screws only)



Product Code	Colour	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BAG				
CAPW100	White	100	100	360
CAP0100	Light Oak	100	100	360
CAPM100	Mahogany	100	100	360